

The easy route to a big finish!

The Image 62 Plus offers pre-defined control settings, easy material loading and other user-friendly features that make sure new users will have its operation down to a fine art within minimum time!

Capable of mounting, laminating and encapsulating up to 60" digital prints, the Image 62 Plus can operate with a wide range of materials, including the popular Thermashield[™] range of films.

When finishing inkjet prints the Jet Guard[®] range is recommended, which operates at lower temperatures than traditional films and are the ideal solution for inkjet prints.



The Image 62 Plus provides the following Features


Ease of Use	<ul style="list-style-type: none"> • Touch pad control panel with predefined settings for temperature, speed and substrate thickness. • High release silicone rollers for easy cleaning. • L.E.D. setting indicators. • Swing out supply shafts with unique auto-grip for easy loading and positioning of materials. • Simple film tension adjustment. • Automatic upper take-up shaft for removing release liners. • Swinging in-feed table for easy material loading. • Roll-to-roll option.
Optimum Performance	<ul style="list-style-type: none"> • Temperature settings: 50°C (122°F), 95°C (203°F), 110°C (230°F), 120°C (248°F). • Automatic cooling fans for efficient film cooling and smooth performance during heat sealing applications. • Pull roller system for tensioning of material for a flat and even finish. • Microprocessor controller for even temperature control.
Safety	<ul style="list-style-type: none"> • Foot switch for hands free operation. • Comprehensive safety system with emergency stops and self-testing optical safety guard. • CE certified.
Other Features	<ul style="list-style-type: none"> • Sturdy stand alone design with castors and levelling feet. • Quiet mechanical operation. • Anti-static pull rollers to eliminate static build-up.

Image 62 Plus


SPECIFICATIONS



Touch pad control panel with predefined settings for temperature, speed and substrate thickness.

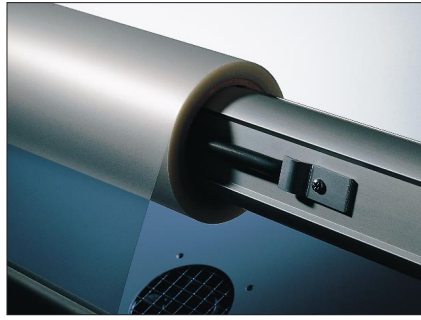

Swing out supply shafts with unique auto-grip for easy loading and positioning of materials.

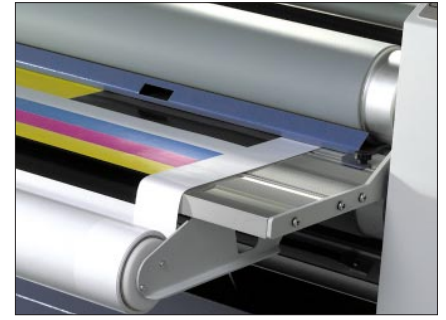

Optional roll-to-roll.

Max. Working Width	62" (1575 mm)
Max. Speed	1,8 m/min. (6 ft/min.)
Max. Roller Opening	1" (25 mm)
Max. Roller Temperature	120°C (250°F)
Dimensions	Width: 86,6" (2200 mm)
	Depth: 24,8" (630 mm) (excl. tables)
	Depth: 30" (762 mm) (incl. tables)
	Height: 48" (1220 mm)
Net Weight	530 kg (1153 lbs)
Shipping Weight	580 kg (1263 lbs)
Electrical Requirements	3N/PE-200 - 250 VAC , 50/60Hz, 16 A
	1N/PE-200 - 250 VAC , 50/60Hz, 32 A
Max. Power Consumption	7000 Watts

SEAL® Brands and Image® are registered trademarks of SEAL Graphics



SEAL Graphics Americas
7091 Troy Hill Drive
Elkridge
MD 21075
U.S.A
Tel: (410) 379 5400
Fax: (410) 379 8960

SEAL Graphics UK Ltd
1 Watkins Close,
Burnt Mills Industrial Estate
Basildon, Essex SS13 1BJ
United Kingdom
Tel: + 44 (0) 1268 530 331
Fax: + 44 (0)1268 725 864

**SEAL Graphics
Europe BV**
Kanaaldijk O.Z. 3
P.O. Box 29,
8100 AA Raalte
The Netherlands
Tel: + 31 (0) 572 345 500
Fax: + 31 (0) 572 345 501

**SEAL Graphics
Pacific Limited**
Unit A, 13th Floor, Block 1
Leader Industrial Centre
Tsuen Wan,
New Territories,
Hong Kong
Tel: + 852 2407 3738
Fax: + 852 2408 0973

Contact your local distributor: